



## BiHiKu5

460 W ~ 480 W

BIFACIAL POLY PERC

CS3Y-460 | 465 | 470 | 475 | 480PB-AG (IEC1000 V)

CS3Y-460 | 465 | 470 | 475 | 480PB-AG (IEC1500 V)

### MORE POWER



Module power up to 480 W  
Module efficiency up to 20.3 %



Up to 11.5 % lower LCOE  
Up to 3.2 % lower system cost



Comprehensive LID / LeTID mitigation technology, up to 50% lower degradation



Compatible with mainstream trackers, cost effective product for utility power plant



Better shading tolerance

### MORE RELIABLE




Carbon footprint reduced up to 25%



Minimizes micro-crack impacts



Heavy snow load up to 5400 Pa, wind load up to 2400 Pa\*

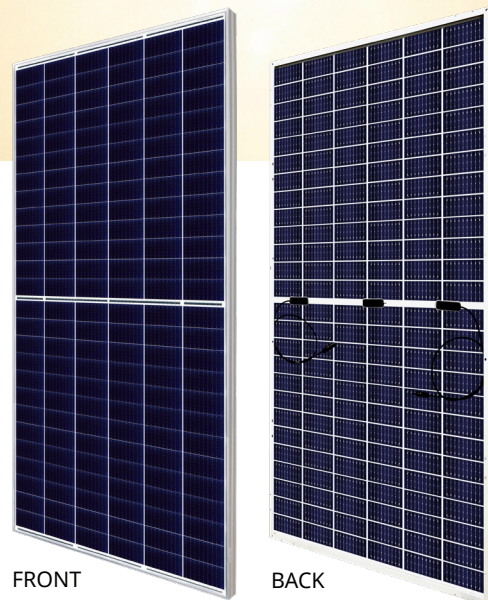

**Linear Power Performance Warranty\***

**12 Years Enhanced Product Warranty on Materials and Workmanship\***

**1<sup>st</sup> year power degradation no more than 2%  
Subsequent annual power degradation no more than 0.45%**

\*According to the applicable Canadian Solar Limited Warranty Statement.

### MANAGEMENT SYSTEM CERTIFICATES\*

ISO 9001: 2015 / Quality management system  
ISO 14001: 2015 / Standards for environmental management system  
ISO 45001: 2018 / International standards for occupational health & safety

### PRODUCT CERTIFICATES\*

IEC 61215 / IEC 61730 / CE / INMETRO  
UL 61730 / IEC 61701 / IEC 62716 / IEC 60068-2-68  
Take-e-way  
Canadian Solar recycles panels at the end of life cycle



\* The specific certificates applicable to different module types and markets will vary, and therefore not all of the certifications listed herein will simultaneously apply to the products you order or use. Please contact your local Canadian Solar sales representative to confirm the specific certificates available for your Product and applicable in the regions in which the products will be used.

**CSI Solar Co., Ltd.** is committed to providing high quality solar products, solar system solutions and services to customers around the world. Canadian Solar was recognized as the No. 1 module supplier for quality and performance/price ratio in the IHS Module Customer Insight Survey, and is a leading PV project developer and manufacturer of solar modules, with over 50 GW deployed around the world since 2001.


\* For detailed information, please refer to the Installation Manual.

**CSI Solar Co., Ltd.**


Canadian Solar MSS (Australia) Pty Ltd., 44 Stephenson St, Cremorne VIC 3121, Australia  
sales.au@csisolar.com, www.csisolar.com/au

## ENGINEERING DRAWING (mm)


Rear View

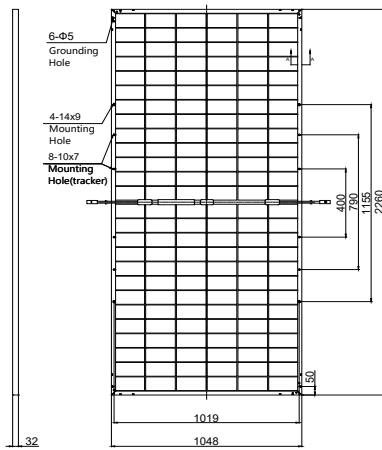

Frame Cross Section A-A

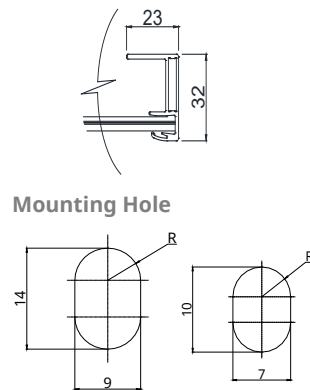

## CS3Y-460PB-AG / I-V CURVES

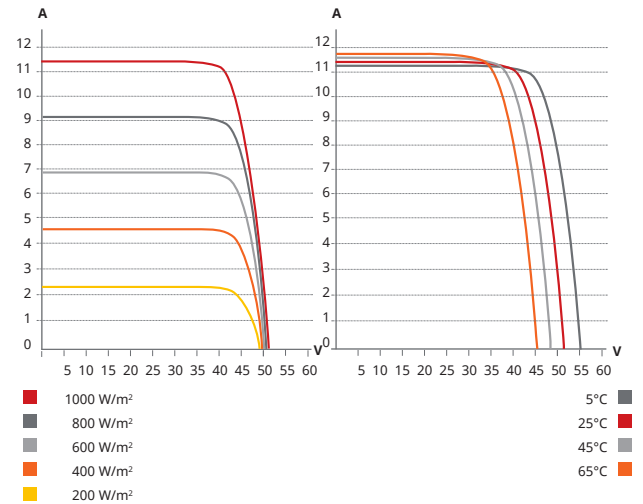

## ELECTRICAL DATA | STC\*

		Nominal Max. Power (Pmax)	Opt. Operating Voltage (Vmp)	Opt. Operating Current (Imp)	Open Circuit Voltage (Voc)	Short Circuit Current (Isc)	Module Efficiency
CS3Y-460PB-AG		460 W	42.8 V	10.75 A	52.0 V	11.38 A	19.4%
	Bifacial Gain**	5%	483 W	42.8 V	11.29 A	52.0 V	20.4%
		10%	506 W	42.8 V	11.83 A	52.0 V	21.4%
		20%	552 W	42.8 V	12.90 A	52.0 V	23.3%
CS3Y-465PB-AG		465 W	43.0 V	10.82 A	52.2 V	11.43 A	19.6%
	Bifacial Gain**	5%	488 W	43.0 V	11.36 A	52.2 V	20.6%
		10%	512 W	43.0 V	11.91 A	52.2 V	21.6%
		20%	558 W	43.0 V	12.98 A	52.2 V	23.6%
CS3Y-470PB-AG		470 W	43.2 V	10.88 A	52.4 V	11.48 A	19.8%
	Bifacial Gain**	5%	494 W	43.2 V	11.44 A	52.4 V	20.9%
		10%	517 W	43.2 V	11.97 A	52.4 V	21.8%
		20%	564 W	43.2 V	13.06 A	52.4 V	23.8%
CS3Y-475PB-AG		475 W	43.4 V	10.95 A	52.6 V	11.53 A	20.1%
	Bifacial Gain**	5%	499 W	43.4 V	11.5 A	52.6 V	21.1%
		10%	523 W	43.4 V	12.06 A	52.6 V	22.1%
		20%	570 W	43.4 V	13.14 A	52.6 V	24.1%
CS3Y-480PB-AG		480 W	43.6 V	11.01 A	52.8 V	11.58 A	20.3%
	Bifacial Gain**	5%	504 W	43.6 V	11.56 A	52.8 V	21.3%
		10%	528 W	43.6 V	12.11 A	52.8 V	22.3%
		20%	576 W	43.6 V	13.21 A	52.8 V	24.3%

\* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C. Measurement uncertainty: ±3 % (Pmax).

\*\* Bifacial Gain: The additional gain from the back side compared to the power of the front side at the standard test condition. It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.

## ELECTRICAL DATA

Operating Temperature	-40°C ~ +85°C
Max. System Voltage	1500 V (IEC/UL) or 1000 V (IEC/UL)
Module Fire Performance	TYPE 29 (UL 61730) or CLASS C (IEC61730)
Max. Series Fuse Rating	25 A
Application Classification	Class A
Power Tolerance	0 ~ + 5 W
Power Bifaciality*	70 %

\* Power Bifaciality =  $\frac{P_{max\_rear}}{P_{max\_front}}$ , both  $P_{max\_rear}$  and  $P_{max\_front}$  are tested under STC, Bifaciality Tolerance: ± 5 %

## ELECTRICAL DATA | NMOT\*

	Nominal Max. Power (Pmax)	Opt. Operating Voltage (Vmp)	Opt. Operating Current (Imp)	Open Circuit Voltage (Voc)	Short Circuit Current (Isc)
CS3Y-460PB-AG	344 W	40.0 V	8.60 A	49.0 V	9.18 A
CS3Y-465PB-AG	348 W	40.2 V	8.66 A	49.2 V	9.22 A
CS3Y-470PB-AG	351 W	40.4 V	8.69 A	49.4 V	9.26 A
CS3Y-475PB-AG	355 W	40.5 V	8.77 A	49.6 V	9.30 A
CS3Y-480PB-AG	359 W	40.7 V	8.83 A	49.7 V	9.34 A

\* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m² spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

## MECHANICAL DATA

Specification	Data
Cell Type	Poly-crystalline
Cell Arrangement	156 [2 X (13 X 6)]
Dimensions	2260 × 1048 × 32 mm (89.0 × 41.3 × 1.26 in)
Weight	29.9 kg (65.9 lbs)
Front / Back Glass	2.0 mm heat strengthened glass
Frame	Anodized aluminium alloy
J-Box	IP68, 3 diodes
Cable	4.0 mm² (IEC), 12 AWG (UL)
Cable Length (Including Connector)	410 mm (16.1 in) (+) / 290 mm (11.4 in) (-) or customized length*
Connector	T4-PC-1 (IEC 1000 V) or PV-KST4/xy-UR, PV-KBT4/xy-UR (IEC 1000 V) or T4-PC-1 (IEC 1500 V) or T4-PPE-1 (IEC 1500 V) or PV-KST4-EVO2/XY, PV-KBT4-EVO2/XY (IEC 1500 V) or UTXCFA4AM, UTXCMA4AM (IEC 1500 V)
Per Pallet	33 pieces
Per Container (40' HQ)	660 pieces

\* For detailed information, please contact your local Canadian Solar sales and technical representatives.

## TEMPERATURE CHARACTERISTICS

Specification	Data
Temperature Coefficient (Pmax)	-0.36 % / °C
Temperature Coefficient (Voc)	-0.28 % / °C
Temperature Coefficient (Isc)	0.05 % / °C
Nominal Module Operating Temperature	41 ± 3°C

## PARTNER SECTION



\* The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. CSI Solar Co., Ltd. reserves the right to make necessary adjustment to the information described herein at any time without further notice. Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills and please carefully read the safety and installation instructions before using our PV modules.

## CSI Solar Co., Ltd.

Canadian Solar MSS (Australia) Pty Ltd., 44 Stephenson St, Cremorne VIC 3121, Australia  
sales.au@csisolar.com, www.csisolar.com/au